



Revolutionary Sealed Design Stands-Up to even the Harshest Environments for Ultimate Safety and Reliability!

- Environmentally sealed recoil spring and brake components provide added reliability, safety and longevity
- Lifeline extends and retracts automatically allowing the user to move around the work area unhindered
- Self adjusting disk brake stops falls within inches and limits arresting forces to less than 6kN for added safety
- Stainless steel and cast aluminum housing resists dents and damage and provides corrosion resistance
- Self locking swivel hook with impact indicator makes connections easy, and provides a visual means of inspection
- Reserve lifeline system contains a 0.6 m reserve for shock absorption when the entire lifeline is extended
- A stainless steel main shaft with sealed ball bearings ensures safe and smooth operation
- Optional retrieval models available for emergency raising/ lowering capabilities
- i-Safe™ Intelligent Safety System is built into every unit to track inspections, control inventory and manage information
- Designed to meet worldwide standards including OSHA, ANSI, CSA, and CE

Superior Protection DBI-SALA self retracting lifelines (SRL's) are the most technologically advanced fall protection devices in the industry. Our SRL's provide the ultimate in mobility and security with on automatic fall arrest mode. They incorporate a lifeline that extends and retracts enabling the user to move about within a recommended working area at normal speeds. Should a fall occur, a speed sensing brake system activates automatically stopping the fall and reducing the forces imposed on the user to safe levels of 6 kN or less.


The World's Only "Sealed" Design DBI-SALA's sealed design is field proven, operating safely on some of the world's most challenging work sites for over a decade. They incorporate a revolutionary patented concept, all dynamic components including the recoil spring and brake system are isolated (environmentally sealed) from foreign elements (ex. grease, moisture, dirt, etc.). You always know your SRL is operating at peak efficiency, without worries about what is happening inside the housing, no matter how dirty or damp your environment. It will maintain consistent lifeline retraction, proper fall arrest distances and forces providing added worker security, productivity and safety. In addition, the sealed design will lower your overall cost of ownership by extending maintenance intervals and product longevity.

Retrieval Models Features

- Built-in emergency retrieval winch for raising and lowering personnel
- Winch drive overload device, heat treated alloy steel gears, shaft and sealed ball bearings
- Input crank handle has a primary brake which will prevent movement of the load upon release of handle
- Device maintains arresting capabilities when in retrieval mode for complete safety
- After use, the system may be reused subject to inspection requirements for job site flexibility

Specifications:

Rated Capacity: 75 lbs. to 310 lbs. (34kg to 141kg), model 3403400 is 75 lbs. to 420 lbs. (34kg to 189kg) **Length of Lifeline:** 50 ft. (15m), 85 ft. (25.5m), 130 ft. (39m) or 175 ft. (52.5m) **Size:** 50 ft. (15m) = 13.5"x7.9"x6.4" (34cm x 18cm x 16cm), 85 ft. (25.5m) = 16"x9.9"x6.7" (40cm x 25cm x 17cm), 130 ft. (39m) = 18.7"x11.7"x7.2" (47cm x 29cm x 18cm) or 175 ft. (52.5m) = 18.7"x11.7"x10.9" (47cm x 29cm x 27cm) **Weight:** 50 ft. (15m) = 29 lbs. (13kg), 85 ft. (25.5m) = 44 lbs. (20kg), 130 ft. (39m) = 60 lbs. (27kg) or 175 ft. (52.5m) = 100 lbs. (45kg) **General Construction:** Threaded fasteners for bolt-up assembly **Housing Material:** 2 piece, cast aluminum housing with stainless steel cover **Lifeline Material:** 3/16 in. diameter (5mm) galvanized or stainless steel wire rope **Snap Hook:** Zinc plated alloy steel, or stainless steel self locking and swiveling, 5000 lbs. (22.2Kn) tensile strength **Standards:** Meets OSHA 1926.502, OSHA 1910.66, ANSI Z359.1, ANSI A10.32 -- CSA Z259.2.2 Type II -- CE EN 360 (including for horizontal use), CE EN 1496 c1B

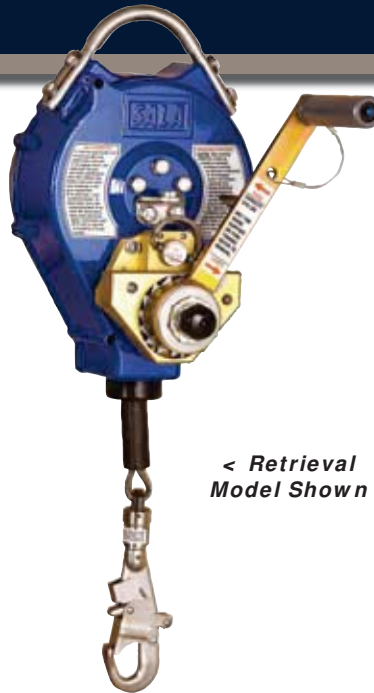

< Retrieval Model Shown



Standard > Model

Sealed SRL Models:

Anchorage Carabiner Sold Separately

- KD2PS15:** 15 m Sealed SRL, 5 mm galv. steel cable, swivel hook
- KD2PS15SS:** 15 m stainless steel cable
- KD2PS15/R:** 15 m with retrieval winch
- KD2PS15RSS:** 15 m, retrieval winch & stainless cable

- KD2PS25:** 25 m Sealed SRL, 5 mm galv. steel cable, swivel hook
- KD2PS25SS:** 25 m stainless steel cable
- KD2PS25RSS:** 25 m retrieval winch & stainless cable

- KD2PS39:** 39 m Sealed SRL, 5 mm galv. steel cable, swivel hook
- KD2PS39SS:** 39 m stainless steel cable
- KD2PS39RSS:** 39 m retrieval winch, stainless cable

Capital Safety

USA: 800.328.6146 • Canada: 800.387.7484 • Asia: +65 6558 7758 • Australia: 1800 245 002 • New Zealand: 0800 212 505
 Europe, Middle East, Africa: +33 (0)4 97 10 00 10 • Northern Europe: +44 (0) 1928 571324
www.capitalsafety.com • information@capitalsafety.com