

Art. : Horizontal Temporary Lifeline - 2 users

Version: No.3 - 3/2021

Art. no. : 16500

Description


This adjustable temporary lifeline is suitable for up to two users and adjustable between 2 and 20 meters. This lifeline comes with a handy carry bag.

Characteristics:

- **Recommendation** – anchorage to a structure without the need to use an anchorage sling; or for attachment to anchor points, such as the concrete anchor, 16651.

The steel ratchet allows for system tensioning after adjusting to the required length.

Provided with an inseparable bag for storing excess strap during use, and to store the system when not in use.
- **Supplied with** – two steel screw-locking karabiners (16550).
- **Compliance** – Conforms to EN 795:1996 Class B.
- **Breaking strength** – 25 kN.
- **Number of users** – Max. two users.

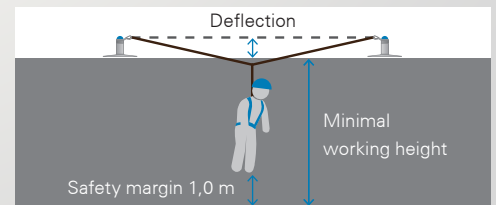

COMPONENT SPECIFICATIONS

Material of the components:


- Webbing: Polyester.
- Ratchet: Steel.

Length:

2 - 20 m

Unit weight:

3.4 kg

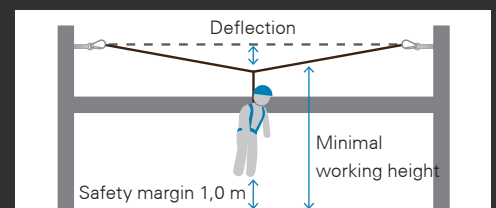

AET (UE) N°2777/13781-01/E01-01
Satra Technology Europe Ltd., N° 2777,
Bracetown Business Park, Clonee,
Dublin, D15YN2P, Ireland

MODULE D FI14/14003.02
SGS Fimko Oy, N°0598
Takomotie 8,
00380 HELSINKI, Finland



Contact

For questions or inconveniences about the product, the installation or use of it, please contact your supplier or XSPlatforms.

Supplier:

Disclaimer

XSPlatforms believes that the information in this technical data sheet is an accurate description of the typical uses of the product. XSPlatforms, however, disclaims any liability for incidental or consequential damages, which may result from the use of the product that are beyond its control. Customers must satisfy themselves as to the suitability of this product for their application. XSPlatforms maintains the right to change and alter the product composition and production process and thereby the performance characteristics of the product at all times without notice.

For questions about the installation of this product, please refer to the manual for details or contact your supplier or XSPlatforms.